
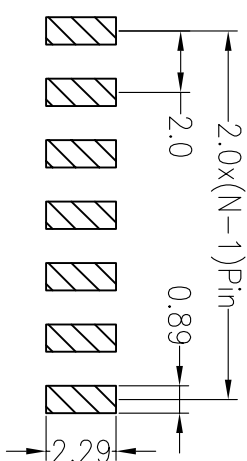


SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

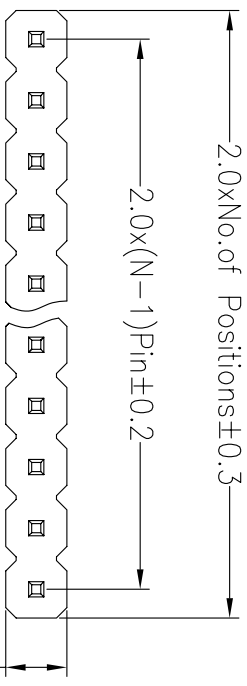

Ordering Information



1320 11 XX X N XX Z XXX X 01

No. of Pins Per Row
 1x40
 2x40
 1--40
 2--80

Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP

Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:tin

Pin Length
 Packing
 0=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 SN:tin

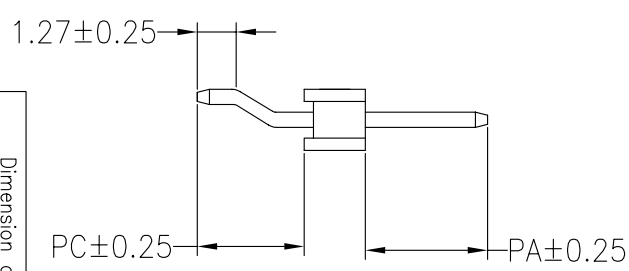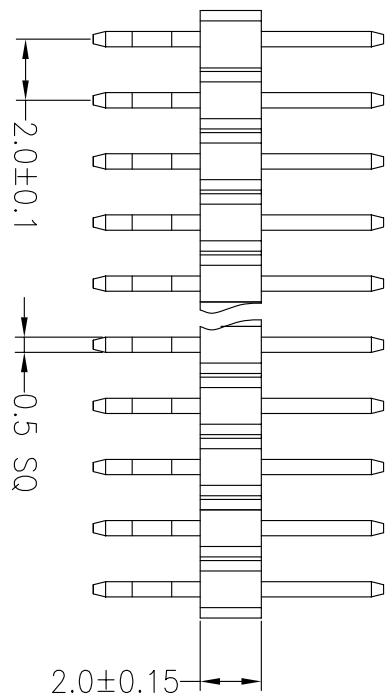

ITEM	PA	PC	L
Standard	4.00	2.80	9.00
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	
1			

OPERATION	DRAW	YTYuSheng	12.04.11
X.X	±0.30		
X.XX	±0.20	CHECK	
X.XXX	±0.10		
Angle	±3°	APPROVE	
DIM	TOL		

SCALE	FIT	PART NO.	TITLE:
UNIT	mm	132011XXXXXXZXXXX01	2.0PH 1xnPin H2.0 90° SMT
SIZE	A4		
SHEET	1/1		
PROJ.			

深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992			
--	--	--	--