



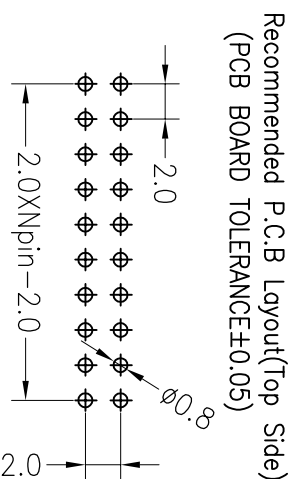

SPECIFICATIONS

Rated Current: 1.50AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 800MΩ Min
 Operation Temperature: -40°C to +105°C


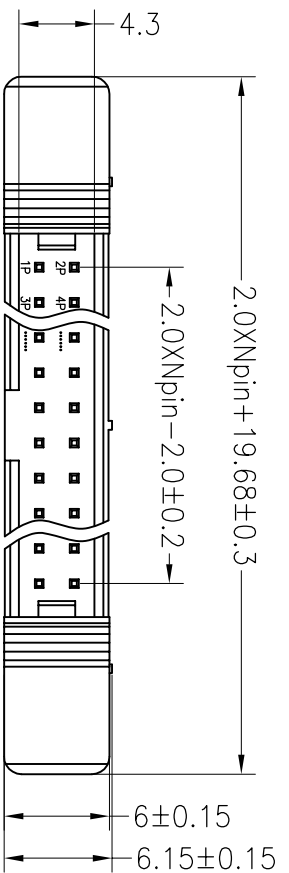


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3320-XX S XX X X L X 01

- No. of Pins: 6--64
- Contact Plating: G0:Gold Flash, G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, SN:In
- Insulator Material Option: A=BK-PBT, C=BK-PA6, D=BK-PA66, E=BK-PA9T, F=BK-LCP
- Color Type: B=Black, G=Grey
- Latch Type: L=Long Latch
- Packing: O=PE Bag, A=Tube, T=Tray

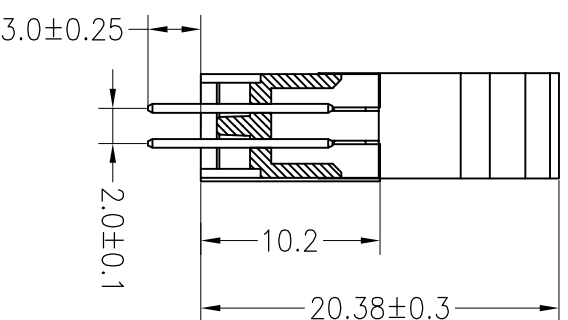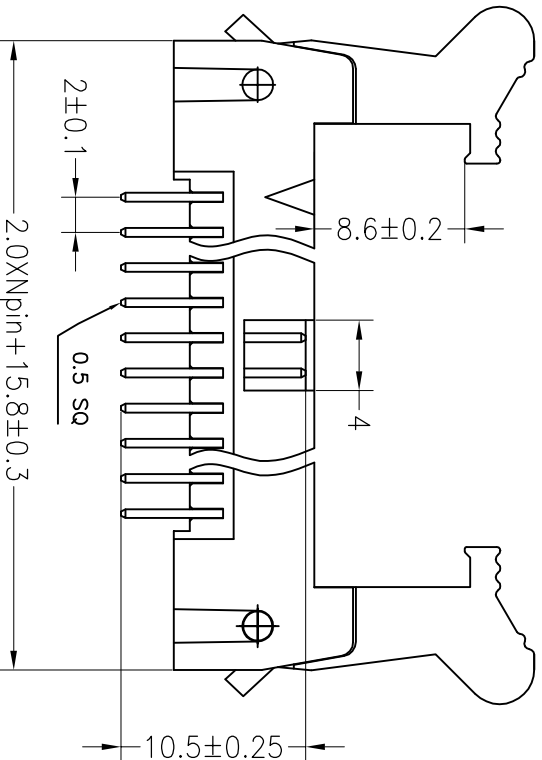

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	YYuSheng	12.10.05	UNIT	mm	A4	1/1	PART NO. 3320-XXSXXXLX01	
X.XX	±0.20	CHECK		SIZE				3320-XXSXXXLX01	
X.XXX	±0.10			SHEET				2.0 ejector header Npin 180°长耳	
Angle	±3°	APPROVE		PROJ.					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			
A0	2012.10.05	NEW DRAWING							
1									

JIN SHENZHEN JINLING ELECTRONIC CO.,LTD
 深圳市锦凌电子有限公司
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992