





FILE NO: E392810

SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

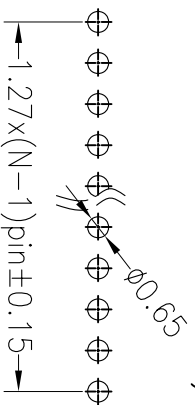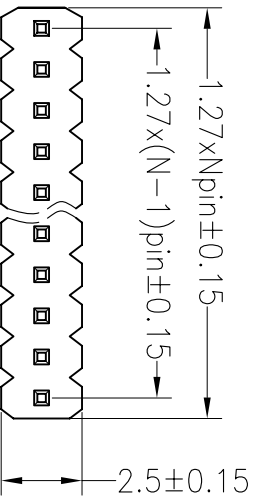

Ordering Information

1425 21 XX X N XX S XXX X 01

No. of Pins Per Row: 1-50
 Insulator Material Option:
 C=BK-PA6T
 E=BK-PA9T
 F=BK-LCP
 Contact Plating:
 G1: 1U" Gold
 G2: 1.5U" Gold
 G3: 2U" Gold
 G4: 3U" Gold
 G5: 5U" Gold
 SO: Gold Flash/Tin
 SN: Tin
 Pin Length:
 XXX
 Packing:
 A=Tray
 T=Tube

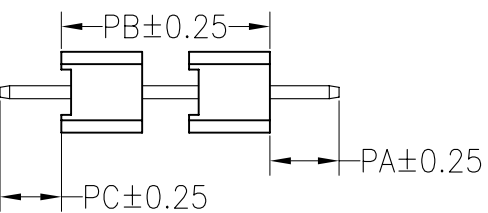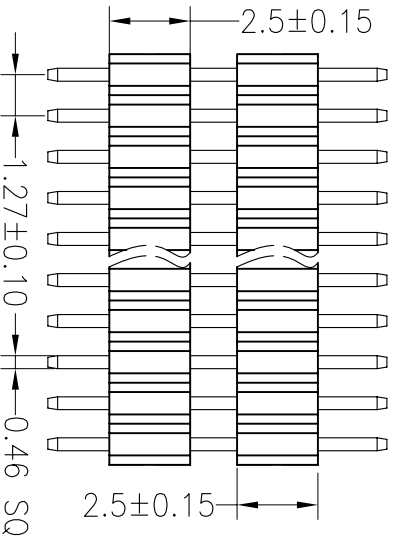

Dimension antitheses list

ITEM	PA	PC	PB	L
Standard	4.00	2.40		
Alternate				

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

OPERATION	DRAW	YTYuSheng	12.03.28	SCALE	FIT	PART NO.	142521XXXXXXSXXXX01
X.X	±0.30			UNIT	mm		
X.XX	±0.20	CHECK		SIZE	A4		
X.XXX	±0.10			SHEET	1/1	TITLE:	1.27PH H2.5+2.5mm 1xNpin DIP
Angle	±3°	APPROVE		PROJ.			
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	
1			