
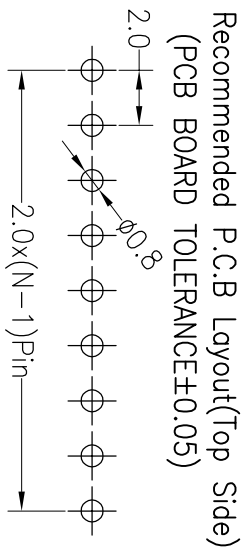


## SPECIFICATIONS

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C



Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

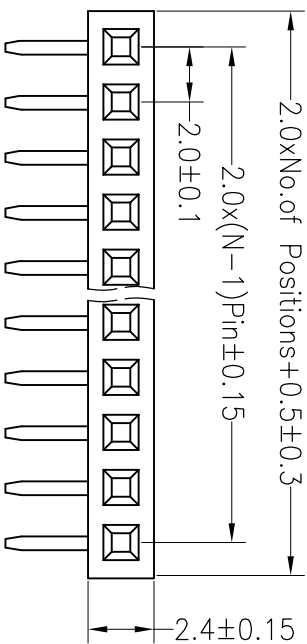

## Ordering Information

2343 01 XX X N XX R U X 01

- No. of Pins Per Row: 1~2~1\*40
- Insulator Material Option:
  - A=BK-PBT
  - B=BK-PA66
  - C=BK-PA6T
  - D=BK-PA46
  - E=BK-PA9T
  - F=BK-LCP
- Contact Plating:
  - G0: Gold Flash
  - G1: 3U" Gold
  - G2: 5U" Gold
  - G3: 10U" Gold
  - G4: 15U" Gold
  - G5: 30U" Gold
  - S0: Gold Flash/Tin
  - SN: Tin
- Packing:
  - A=Troy
  - T=Tube
  - P=Tube+Cap
  - R=Reel+Cap
  - M=Reel+Mylar

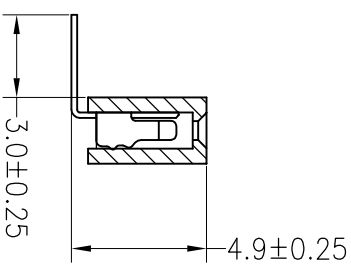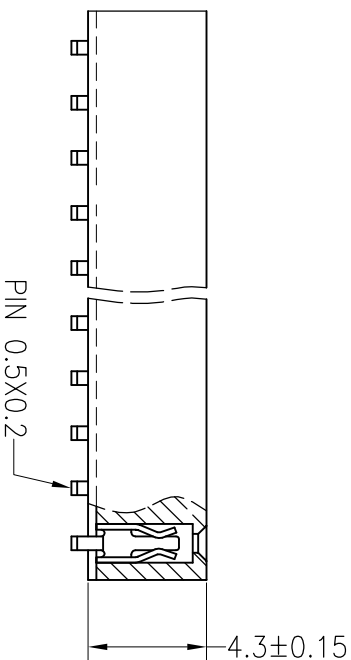

OPERATION		DRAW		SCALE		FIT		TITLE:	
DIM	TOL	APPROVE	Y.YuSheng	19.04.09	UNIT	mm	A4	PART NO.	2.00PF H4.3mm 1xNpin 90° W2.40
X.X	±0.30	CHECK			SIZE	A4	1/1	234301XXXXXXRUX01	
X.XX	±0.20				SHEET	1/1			
X.XXX	±0.10				PROJ.				
Angle	±3°								

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892