
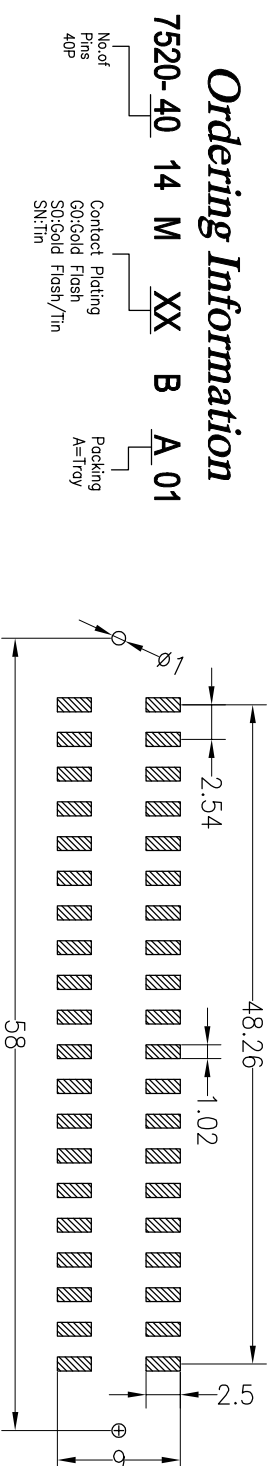
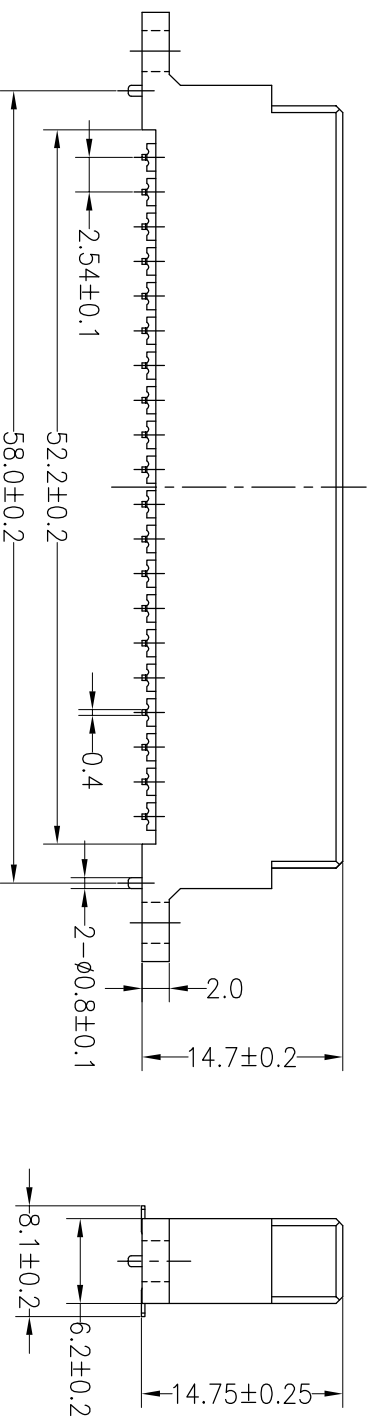


HSE RoHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C
 Insulator Material: Polyester(UL94V-0)
 Standard: PPS+40% Glass Fiber

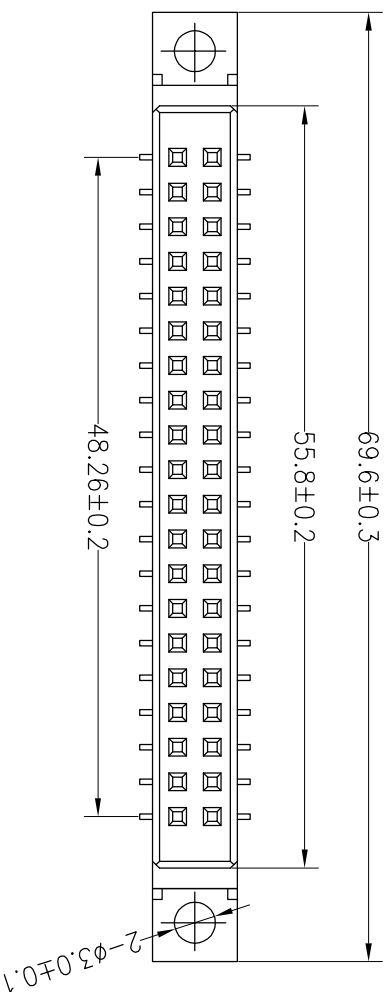

Ordering Information

7520-40 14 M XX B A 01

P.C.B Layout

OPERATION	±0.30	DRAW	YYuSheng	12.03.28	SCALE	FIT	PART NO.	深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892
	X.X		UNIT			mm		
CHECK	±0.20	CHECK			SIZE	A4	7520-4014MXXBA01	2.54mm 40PIN H14.7mm SMT 特殊母座
	X.XX		SHEET			1/1		
Angle	±0.10	APPROVE			PROU.	1/1		
±3°	±3°							
CHANGE								
REV	DATE	MODIFICATION DESCRIPTION						
A0	2012.03.28	NEW DRAWING						
1								

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 7520-4014MXXBA01

2.54mm 40PIN H14.7mm SMT 特殊母座