
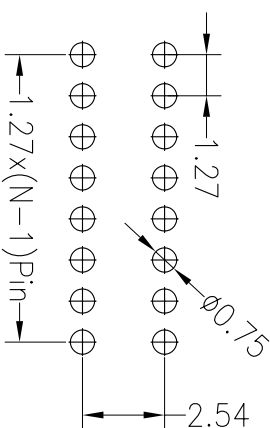


SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


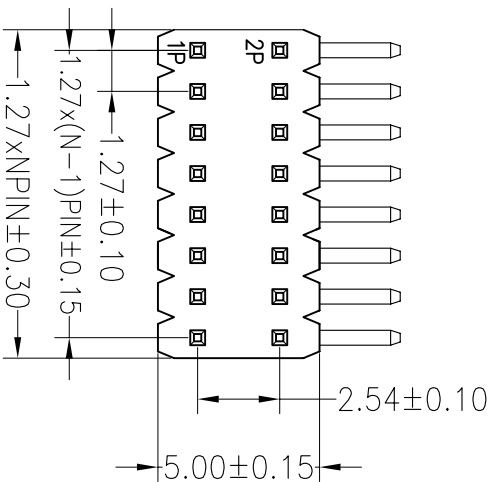


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

1525 12 XX X N XX R XXX X 01

No.of Pins Per Row 2*1~2*50
 Insulator Material Option
 A=BK-FBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:tin
 Pin Length
 Packing
 O=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

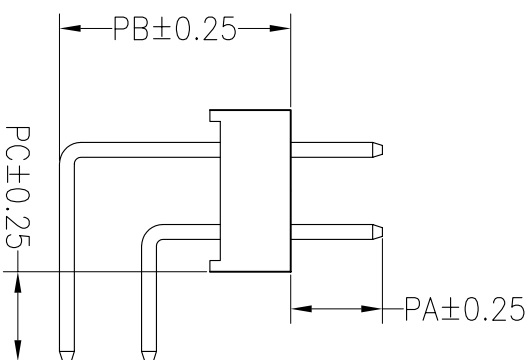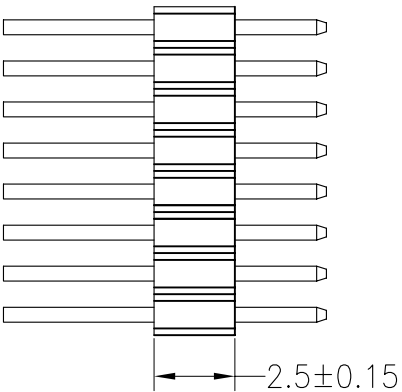

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	2.80	7.00	1.80	9.8/14.8
Alternate				

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	Ben	12.03.28	SCALE	FIT	PART NO.	TITLE:
A0	2012.03.28	NEW DRAWING		X.X ±0.30	CHECK			UNIT mm	A4	152512XXXXXXRXXX01	1.27*2.54PH H2.5mm 2xNpin 90°
1				X.XX ±0.20				SIZE A4	1/1		
				X.XXX ±0.10				SHEET	1/1		
				Angle ±3°	APPROVE			PROJ.			
				DIM TOL							