
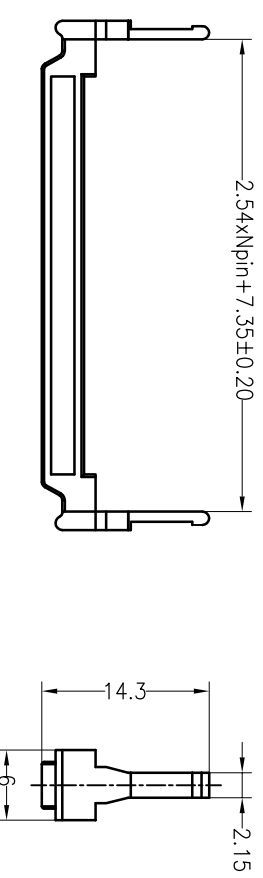
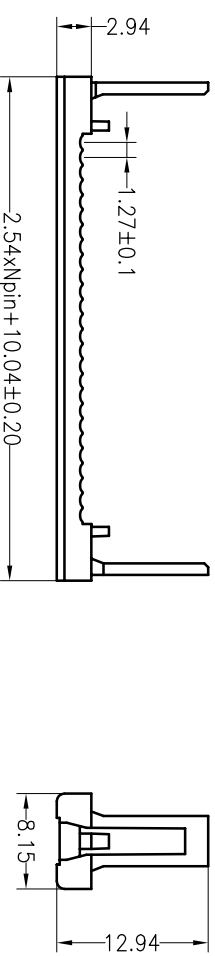
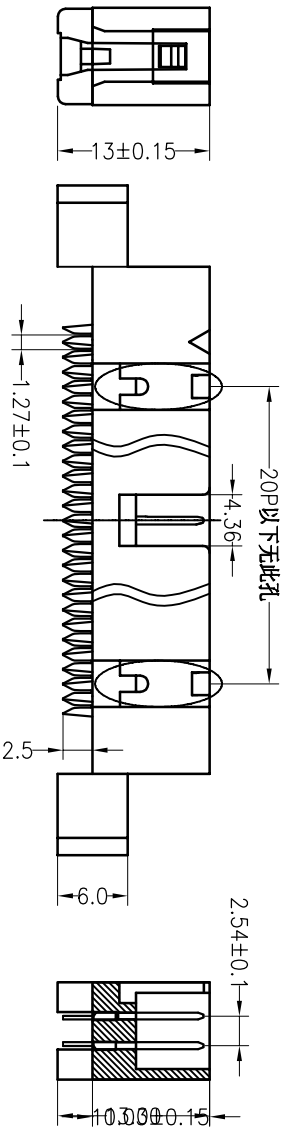


HSE ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

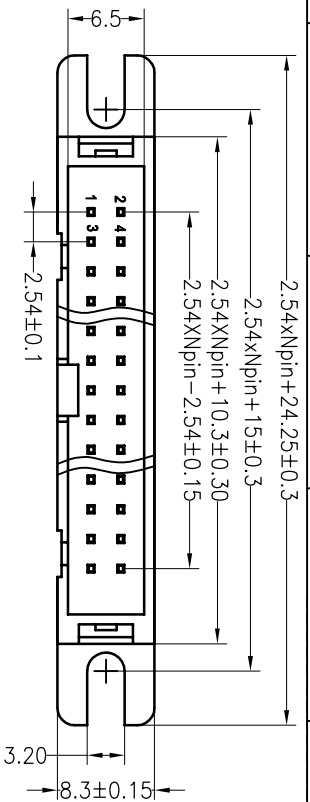

Ordering Information

3910 XX XX W X N 01

No. of Pins: 6--64P
 Contact Plating: G0: Gold Flash, G1: 3U" Gold, G2: 5U" Gold, G3: 10U" Gold, S0: Gold Flash/Tin
 Insulator Color: B=Black, G=Grey
 SN: Tin

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	YYuSheng	12.03.28	UNIT	mm	A4	1/1	PART NO. 3910XXXXXXN01	
X.XX	±0.20	CHECK		SIZE	A4			2.54mm 压排式 筒牛 有定位孔 Npin	
X:XXX	±0.10	APPROVE		SHEET	1/1				
Angle	±3°			PROJ.					
DIM	TOL	CHANGE							
REV	DATE	MODIFICATION DESCRIPTION							
1	2012.03.28	NEW DRAWING							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892